

# REVERSE DRIVEN


# SR

*TerraForce*

**SR 052**  
**060**  
**072**



**5** year  
Limited Gearbox  
Warranty

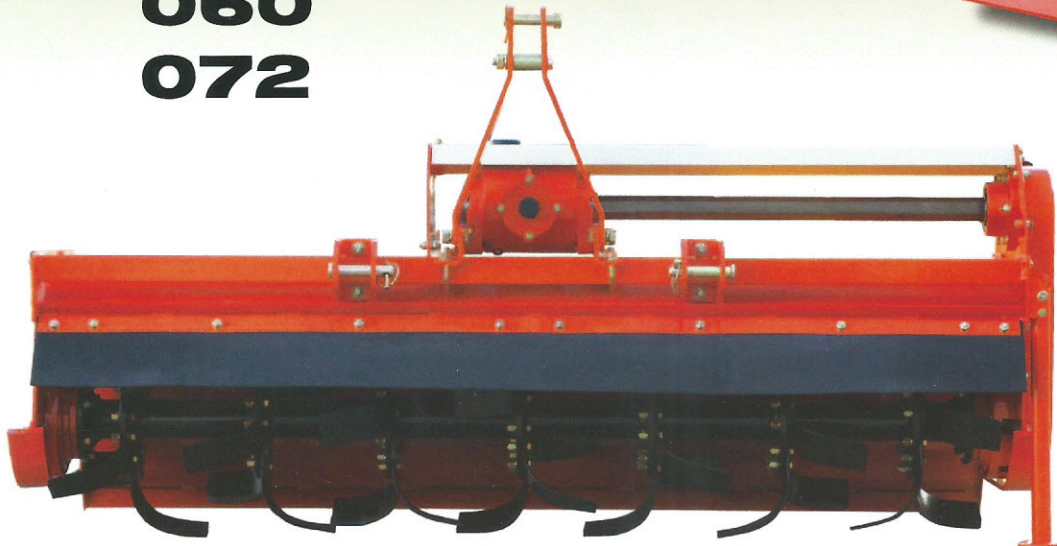

# REVERSE DRIVEN OFFSET TYPE

SR 052 / 060 / 072



## FEATURES

- Greater depth penetration resulting in moving and pulverizing more soil
- More of the residue in the soil
- Reverse action 'sucks' tiller into ground does not work on top of hard ground like forward tiller can
- Variable application in landscaping, nurseries, gardens and light commercial use

## SPECIFICATIONS

Units : Inch, Lbs, Ea

MODEL		SR 052	SR 060	SR 072
Recommended Tractor HP		15-35	26-35	35-50
Tiller Size	Length	28.4	28.4	28.6
	Width	58.8	66.5	77.4
	Height	36.6	36.6	38.8
<b>Weight</b>		<b>476</b>	<b>514</b>	<b>633</b>
Tilling Width		52	60	72
Tilling Depth(Max)		7 1/2	7 1/2	8
No. of Franges		5	6	7
No. of Blades		30	36	42
Hitch		Cat. I	Cat. I	Cat. I
Rotor Swing Diameter		18.1	18.1	19.2



**Ansung-USA, LLC.**

Ph:214-821-6400

Email: sales@ansungusa.com

www.ansungusa.com